


Nastavení A/VDSL profilu - jména a hesla pro modem Huawei EchoLife HG622u


Kompletní nastavení modemu včetně ručního spuštění a zabezpečení bezdrátové sítě se provádí pomocí webové konfigurace. Proto je potřeba mít pro prvotní nastavení WiFi počítač připojený k modemu síťovým kabelem.

Do prostředí webové konfigurace modemu vstoupíte standardně na adrese <http://10.0.0.138>

Stačí kliknout na odkaz, případně tuto adresu zadat do internetového prohlížeče.

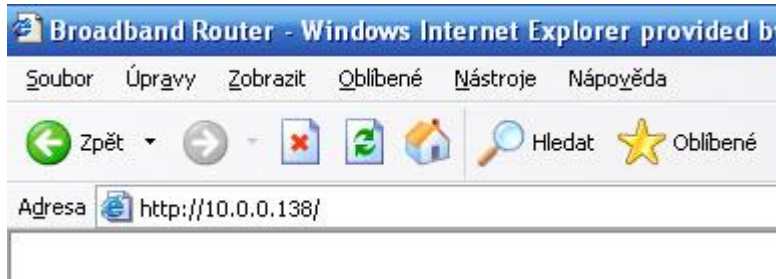

K přihlášení do webové konfigurace potřebujete znát uživatelské jméno a heslo. Pokud jste jméno a heslo dříve sami nezměnili, platí standardní uživatelské jméno „**admin**“, také heslo je „**admin**“. Přihlašte se kliknutím na **Login**.

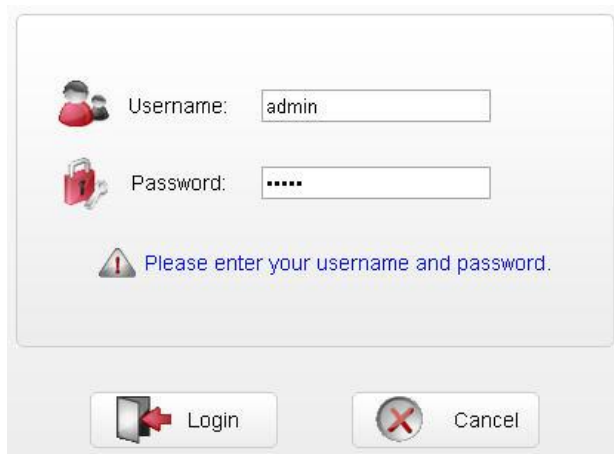

Po přihlášení vyberte v levém svislém menu položku **Basic** a následně **WAN**.

Po pravé straně se zobrazí stránka s konfigurací **WAN Connection**. Klikněte a budete upravovat jen **INTERNET_ATM_8_48** (ADSL) a **INTERNET_PTM_848** (VDSL)

Přepíšete pouze: User name: **VF** a Password: **VF**

Ostatní políčka nechte nastavená tak, jak jsou.

Nyní stačí už jen na samém konci stránky kliknout na tlačítko **Submit**.

The screenshot shows the Huawei Home Gateway configuration interface in Internet Explorer. The browser address bar shows `http://10.0.0.138/html/content.asp`. The page title is "HUAWEI Home Gateway". The navigation menu on the left includes: Setup Wizard, Status, LAN Ports, IPv6, Basic, DSL, Link Interface, WAN, LAN, WLAN, Advanced, and Maintenance. The "Basic" menu item is highlighted with a red arrow. The "WAN" sub-menu item is also highlighted with a red arrow. The main content area displays a table of WAN connections:

Name	Connection Type	Connection Status	IP Address	Enable	Remove
IPTV_ATM_8_35	Bridging	Pending Disconnect		On	<input type="checkbox"/>
IPTV_PTM_835	Bridging			On	<input type="checkbox"/>
INTERNET_ATM_8_48	IP_Routed (PPP)	Pending Disconnect		On	<input type="checkbox"/>
INTERNET_PTM_848	IP_Routed (PPP)			On	<input type="checkbox"/>
3G BACKUP	IP_Routed (PPP)	Disconnected		On	<input type="checkbox"/>

Below the table, the configuration details for the selected connection "INTERNET_ATM_8_48" are shown:

- WAN connection: Enable
- Service list: INTERNET TR069
- Bind list: SSID1 SSID2 SSID3 SSID4
- Connection type: IP_Routed (PPP)
- IPv4: Enable
- NAT: Enable
- Authentication mode: CHAP
- Connection trigger: Always On
- User name: O2
- Password:
- IPv6: Enable

Red arrows point to the "Basic" menu item, the "WAN" sub-menu item, the "INTERNET_ATM_8_48" row in the table, and the "User name" and "Password" input fields.

Copyright © Huawei Technologies Co., Ltd. 2009-2010. All rights reserved.